

# LMRCC-DA-165HT | Battery Cell

ENGINEERED POWER, BATTERY DATA SHEET




DOT Tested · Hermetically Sealed · High Quality · Reliable & Safe

Serviceability is part of our promise. Engineered Power's global network of engineers provides localized expert design, experienced service knowledge, and timely product delivery where you want it and when you need it.

## Battery Features

- primary
- lithium thionyl chloride
- high energy
- high temperature
- moderate rate
- custom terminations

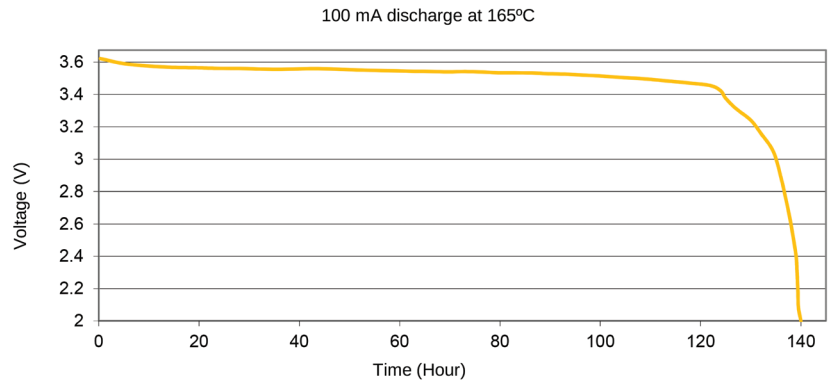

## Technical Data

Capacity:  
14 AH Nominal

Voltage:  
3.67 V OCV  
3.60 V CCV – mA, 165°C

Constant Current Capability:  
100 mA Nominal  
200 mA Max

Operating Temperature:  
-40°F to +329°F  
-40°C to +165°C

## Physical Data

Diameter:  
0.99 inch ± 0.010 (25.1 mm)

Height:  
3.81 inch ± 0.050 (96.8 mm)

Weight:  
3.5 ounces (100 grams ± 5)

## Suitable Applications

Measurement while drilling (MWD),  
downhole & pressure gauge  
applications, memory backup, high  
shock & vibration application.

## Shock & Vibration Data

UN/DOT Certified

Shock Test:  
1,000G 0.5 ms shocks in  
X, Y, Z axis at 150°C for  
10 shocks

Vibration Test:  
40GRMS vibration at  
150°C

*Minimize Your Risk and Maximize Your Power!*

#20, 3103 - 14 Avenue N.E.  
Calgary, Alberta, Canada  
T2A 7N6



**ENGINEERED POWER**

www.engineeredpower.com | email info@engineeredpower.com

1750 Evergreen Street  
Duarte, California, USA  
91010